

Automatic electronic hand dryer


- Automatic electronic hand dryer.
- Model for mounting on the surface.
- ABS housing, white finish.
- Suitable for collectivities and designed for high traffic bathroom and continuous use.
- Robust, anti-vandal and safe because it is built without sharp edges or other dangerous elements.
- In accordance with European safety directives (EC).

TECHNICAL DATA

- Housing made of a single piece of ABS, white finish, 3 mm thick.
- Electronic infrared sensor that stops the function when the hands leave the active range.
- Air temperature (room temperature of 20°C): 60 °C.
- Universal motor without brushes (maintenance not needed).
- Motor speed: 2800 r.p.m.
- Air speed: 65 km/h.
- Total power: 2050 W (optional 1200 W).
- Motor power: 110 W.
- Voltage/Frequency: 220-240 V ~ 50/60 Hz.
- Electrical isolation: Class II.
- Maximum consumption: 9 A.
- Noise level from 2 meters: 60 dBA.
- Protection index: IPX1.
- Dimensions: 286 height x 222 width x 100 depth (mm).
- Net weight: 2,6 kg.
- Weight with individual packing: 3 kg.
- With safety thermal limiter and automatic stoppage due to vandalism.
- Function: place your hands under the appliance. The hand dryer will start automatically and it continues working while the hands are within the active range. The device switches off after a few seconds of removal.
- Cleaning: stainless steel needs maintenance because dust can eventually damage the chromium (Cr) content in stainless steel. We recommend monthly cleaning with a stainless steel special cleaner.
- estimated drying time: 40 seconds. Adjustable time by potentiometer from 0 to 90 seconds.

SUGGESTED TEXT FOR PRESCRIPTION

NOFER hand dryer, with ABS housing, white finish, hot air driven with electronic sensor, 2050 W power and temperature of 60°C. Speed motor: 2800 r.p.m. Dimensions: 286 height x 222 width x 100 depth (mm).



NOFER S.L.
 Avenida de la fama, 118
 08940 · Cornellà de Llobregat (Barcelona)
 Tel +34 934 742 423 · Fax +34 934 743 548
 nofer@nofer.com · www.nofer.com

Related Products


01481.B

01481.W

01600.S

01491.S

TECHNICAL DRAWING

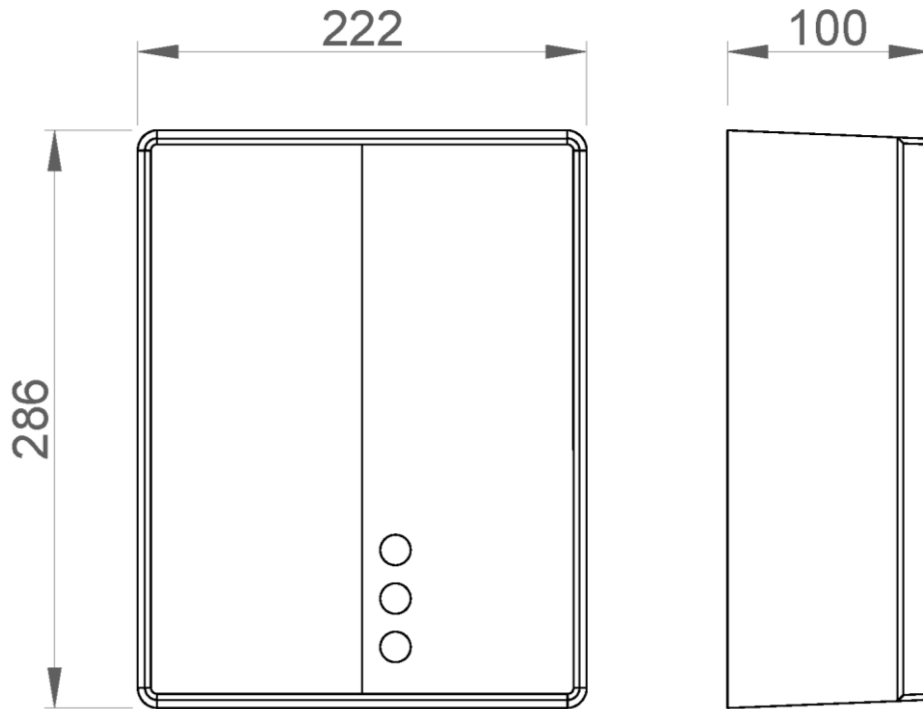

DIMENSIONS IN mm



NOFER S.L.
 Avenida de la fama, 118
 08940 · Cornellà de Llobregat (Barcelona)
 Tel +34 934 742 423 · Fax +34 934 743 548
 nofer@nofer.com · www.nofer.com